


Fully Automatic Servo **Overwrapping** Machine For Media (DVD-CD), Cosmetics and Pharmaceuticals

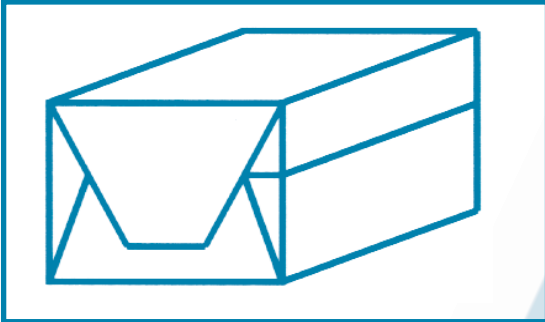

The Filmstar Overwrapper is a universal, fully automatic, tuck-and-fold style overwrapping machine. The system uses heat sealable film to wrap products tightly in the preferred back-seal configuration. A wide range of product sizes can be wrapped, requiring only a few mechanical guides to be switched out, taking as little as 10 minutes to accomplish. Conventional change parts are not required for different packs.

Overwrapper for Media, Cosmetics and Box Overwrapping

An industrial microprocessor controls timing of all subsystems, thus eliminating the need for traditional mechanical cams and linkages. The electronically based design offers superior performance, unparalleled ease of use, and minimal maintenance. An innovative film cutter utilises a single bladed knife, hence ensuring extended service life, and exceptionally simplified eventual replacement. Stand alone operation is superb, yet a versatile interface allows the system to interface with other machines in an extended automated packaging line. A data link is available to record all operating parameters at a remote computer for management, monitoring, or quality assurance purposes.





Servo Overwrapper Specifications

- **Maximum Wrap Sizes:** 200mm (8") x 150mm (6") x 75mm (3").
- **Minimum Wrap Sizes:** 63mm (2.5") x 43mm (1.7") x 9mm (.35").
- **Throughput Speed:** Maximum 60-70 per minute (depending on product).
- **Size Change Over Time:** Approximately 20 minutes.
- **Machine size:** 840mm (33") W, x 1350mm (53") L, x 1626 mm (64") H.
- **Frame:** Adjustable height with lockable castors.
- **Services:** Electric, 240 VAC single phase. Pneumatic, 90 psi. 4 cfm.
- **Interface:** Full interface for automated production lines.
- **Product entry:** Conveyor or optional manual hopper
- **Product exit:** Conveyor out feed. or stacker option
- **Film stock:** 300mm (12") Diameter rolls on 75mm (3") cores.
- **Optional:** Cut to Mark (printed film registration), Tear Tape.

Note: The system is also capable of overwrapping DigiPak, Digiboks, Foldingboks, Special DVDigipak, Slipcase up to 3 inch (75mm) tall, Shufflepak, DVD, CD, Twinpak, Ecopak, Audio Book sleeves, SuperJewel Cases as used in DVD Audio or Super Audio (SACD) and Amaray Cases.

User friendly calibrated
adjustment controls
facilitate simplified
operation and
quick product size
changeovers



contact details

Jenton International Ltd

9/10 Ardglan Industrial Estate
Evingar Road · Whitchurch · Hants RG28 7BB
tel 01256 892194 fax 01256 896486 email rlittle@jenton.co.uk

www.jentonpackaging.co.uk

